



Modul de extensie piconet pentru IP-Link 8 ieșiri digitale 2 A (4 A în total) SNNE-0008D-0003

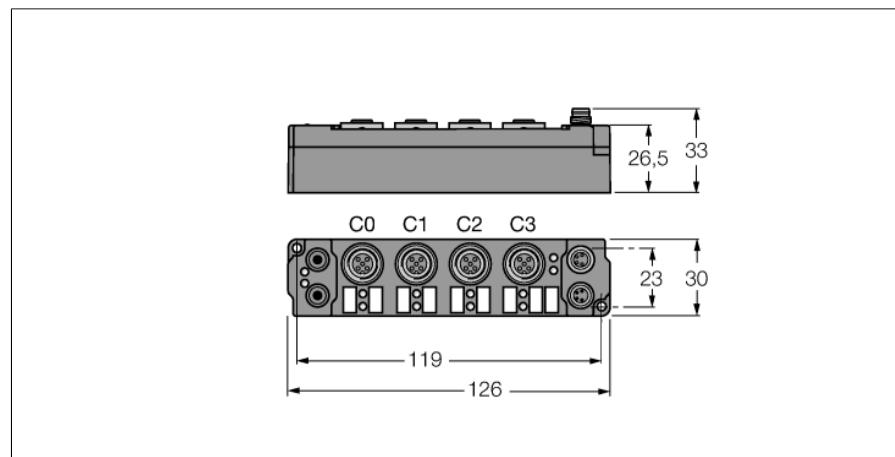


- Conexiune directă la IP link
- Carcasă armată cu fibră de sticlă
- Module încapsulate
- Conector metalic
- Grad de protecție IP67

M12 × 1 Intrare



M8 × 1 Alimentare



Tip	SNNE-0008D-0003
Nr. ID	6824181
Număr de canale	8
Tensiune de alimentare / tensiune de sarcină	20...29 Vcc
Curent de alimentare	≤ 25 mA
Lungime fibră optică	≤ 15 m
Număr de canale	8 ieșiri digitale conform EN 61131-2
Tensiune de ieșire	20...29 Vcc de la tensiunea de alimentare
Curent de ieșire pe canal	2 A (Σ 4 A), protejat la scurtcircuit
Tip de sarcină	rezistiv, inductiv, bec de sarcină
Frecvență de comutare	≤ 500 Hz
Simultaneity factor	0.25
Dimensiuni (l x L x h)	30 x 126 x 26.5 mm
Test vibrații	Conf. cu EN 60068-2-6
Test la șocuri mecanice	conform DIN EN 60068-2-27
Compatibilitate electromagnetică (interferențe)	Conf. cu EN 61000-6-2/EN 61000-6-4
Clasă de protecție	IP67
Certificări	CE, cULus

Process image pentru date de intrare

		Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
PROFIBUS-DP coupling module: "Byte alignment" is disabled (default) and byte n has been used halfway. DeviceNet™, CANopen, INTERBUS, Ethernet coupling module: Byte n has been used halfway. Up to 8 bit user data are mapped.	Output	Byte n (M8)	C3P4	C2P4	C1P4	C0P4	is used by the physically preceding bit-oriented extension module connected via the IP Link.		
		Byte n (M12)	C1P2	C1P4	C0P2	C0P4			
		Byte n+1 (M8)	is used by the physically following bit-oriented extension module connected via the IP Link.			C7P4	C6P4	C5P4	C4P4
		Byte n+1 (M12)				C3P2	C3P4	C2P2	C2P4
PROFIBUS-DP coupling module: "Byte alignment" is disabled (default) and the previous byte has been completely used or "byte alignment" is active. DeviceNet™, CANopen, INTERBUS, Ethernet coupling module: The previous byte has been completely used. Up to 8 bit user data are mapped.	Output	Byte n (M8)	C7P4	C6P4	C5P4	C4P4	C3P4	C2P4	C1P4
		Byte n (M12)	C3P2	C3P4	C2P2	C2P4	C1P2	C1P4	C0P2
		C... = Connector no. – P... = Pin no.							